LISKI SPORT EQUIPMENT

SUPPLIER

OFFICIAL SUPPORTER

# INSTALLATION AND MAINTENANCE LISKI BC-130 NET

vers. 3 28/10/2026

# INTRODUCTION

Liski, thanks to its fifty years experience in the agonistic and touristic ski field, is an Italian Company active on the national and international market, with a full range of products for preparation of race slopes for alpine skiing, snowboard, freestyle, cross-country and biathlon; signs systems and security equipment for every type of ski slope and ski resort. Liski is present in motor sport, soccer, bike and other sports.

Liski main priority is the research for high–performance and safe materials, thanks to lead technologies and collaboration with World Cup circuit teams and ski resort experts.

Starting from the beginning of its activity, the strict synergy between Universities and specialized Experimental Search Laboratories ensured the preparation of safety materials, that are subjected to the laboratory crash tests, along with the extensive testing on the field.


LISKI BC 130 NET is a safety net system conforms to the classification for ski racing at World Cup ski events. Liski is a supplier of most important national ski teams and also for very important ski events worldwide like Olympic Games and World Championships.

Every year many hundreds of kilometers of this system are installed in many ski resorts in the World and these nets save the life of hundreds of people; we continually receive numerous positive feedback from installation crews, race organizer committees, technical delegates, coaches, and everyone involved in making ski racing.

Design, manufacturing and assembly of LISKI BC 130 NET system are made in Italy, synonymous of quality and professionalism; these systems are very easy and fast to use and to assemble; technical specifications, and fully documented testing reports can be requested to info@liski.it

## MATERIALS

### NET

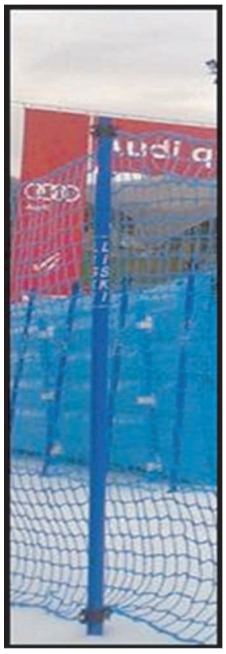


- Material: Polyethylene (PE).
- Dimension: Lenght 15 m, height 1,3m, plait Ø 3,5 and mesh 50x50 mm.
- Weight: 364 g per linear meter (maglia 50x50 mm).
- Properties: high resistance to abrasion and atmopheric agents (including UV rays)

### POLES

- Material: Polycarbonate (PC).
- Dimension: height 1,65 m, Ø 35 mm.
- Quantity: variable from 16 to 9 poles per net, in order to the specific situation.
- Properties: resistence to atmospheric agents (including UV rays).
  Easy and quickly in replace-ment.

### HOOKS



- Material: Nylon (PA)
- Dimension: Ø 35 mm
- Quantity: 2 hooks for each pole (up and down)
- Properties: Atmospheric agents resistance (including UV rays)
  Ease and speed in replacement.

---

WARNINGS: FOR SAFETY REASONS, STAYING INSIDE THE SLOPE, THE POLES MUST BE ALWAYS BEHIND THE NET

THE LISKI BC130 NET ARE SAFETY/PROTECTIONS NETS FOR TOURISTS AND ATHLETES.

LISKI WILL NOT BE RESPONSABLE FOR FURTHER USED

## BEFORE USE

These installation guidelines apply exclusively to factory assembled integrated LISKI BC-130 NET systems. Use of individual components outside of factory assembled integrated LISKI BC-130 NET systems, and/or any substitution or modification of any components may cause serious injury or death.


Ski racing are potentially dangerous sports and the LISKI BC-130 NET system must be installed in conformity with these installation guidelines. If installation is effected (in whole or in part) outside of installation guidelines, the efficacy of the LISKI BC-130 NET system may be seriously compromised. Any installation effected outside of recommended parameters should be recorded, detailed and be conducted under the supervision of a qualified authority.

The installation of LISKI BC-130 NET systems must only be carried out by personnel who have received and reviewed all of the information contained in the present document.

## INSTALLATION


To put the poles into the snow, ice or ground, LISKI suggest to use Ø 32 or 35mm drill bit, depending on the snow conditions.
A minimum of 30 cm of snow is requested for pole stability, and clean the net in case of snowfall.
Normally these nets are assembled at the distance of about 10mt from the area to protect.
For the assembling of protection system, before to fix the net to the hooks, the poles must pass between net meshes, maximum every 3 meshes for Competitions, while could be only one time in the middle of the net for tourist ski area.
The hooks must be (1 in the top, 1 in the lower part of pole); the lower hook should be forward down, the others forward up.
The groups of net, all of the same kind, should be connected and the “uphill” group should surmount the “downhill” group, to avoid that the fallen skier can impact and pass through the only opening of the net, at the joint by two net groups; do not align joints of net sections in the same direction of impact of the skier.
The number of rows that must be placed depends by situation and by danger level; LISKI BC-NET can be placed in 1,2,3 or more rows; install the second row of net parallel to the first net, the distance between the nets should be as described in the set-up model. Note: LISKI BC- NET protection system can remain assembled on the track throughout the season, without storing it after each single use; the system must in any case be constantly checked before and after each use by the personnel in charge of the work, especially in the event of heavy snowfall and significant atmospheric events.

# PROTECTION SYSTEM EXAMPLE LISKI BC 130 NET

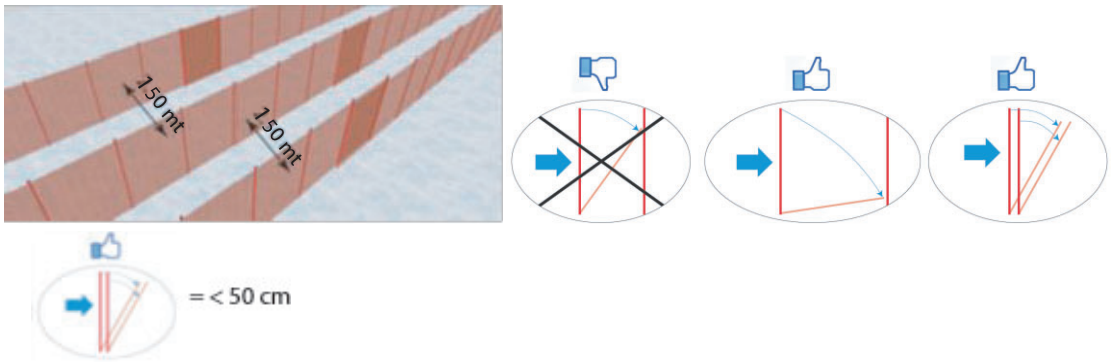





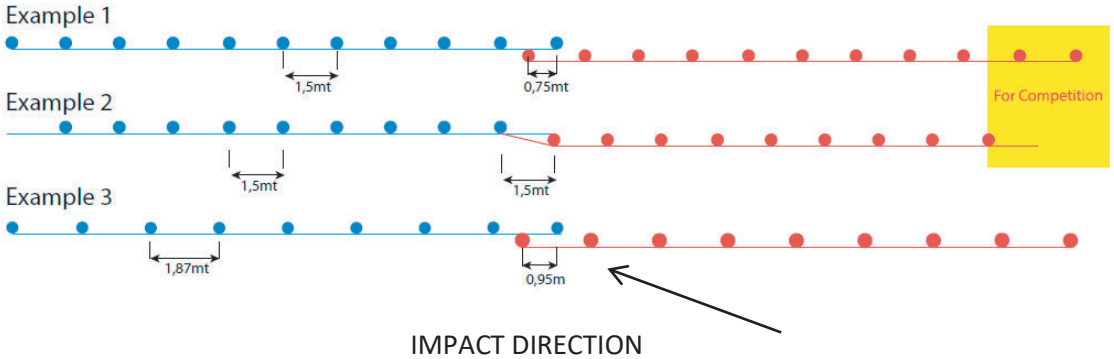


IMPACT DIRECTION

The “Uphill” group (red) should surmount at the “Downhill” one (blue), to avoid that the fallen skier can impact and pass through the only opening of the net, at the joint by two net groups.

**EXAMPLE 1 DESCRIPTION**

**PROTECTION SYSTEM TYPE “BC” ON SLOPE IN COMPETITION**


nr. 3 or more rows made with:

- nr. 2 or more groups of 15m x height 1,3 m of braided net, plait ø 3,5mm and mesh 50x50mm

- nr. 22 polycarbonate poles ø 35 x h 1300mm, with 2 net hooks each at the top and low position; the poles must pass between net meshes, maximum every 3
(nr. 9 - 11 poles for each group)

**For the disciplines of alpine skiing, cross-country skiing, ski jumping, and Nordic combined, it is strictly prohibited to display advertising banners.In the case of snowboard, ski cross, and biathlon, the installation of advertising banners must be expressly authorized by the Race Director and the Technical Delegate.**

## EXAMPLE GS: ATHLET WEIGHT 100 KG, SPEED 70 / 80 KMH

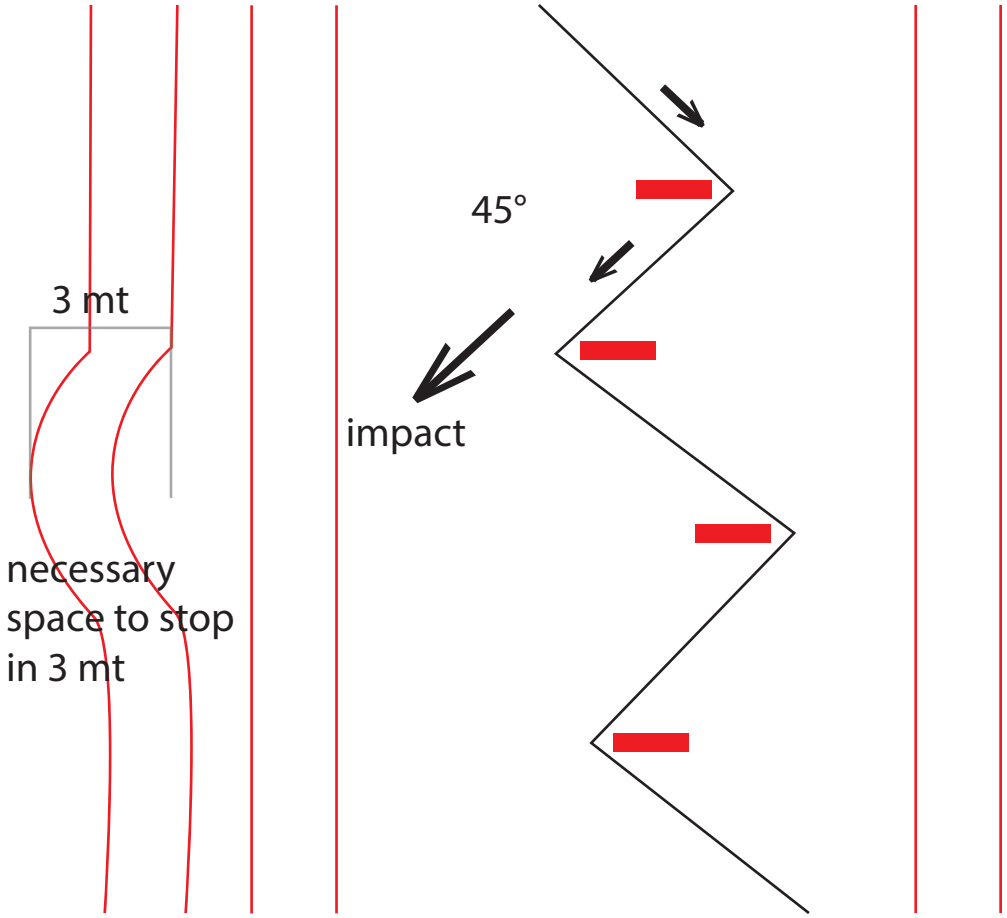


## AFTER USE

The inspection of LISKI BC-NET systems must be carried out before and after each use by personnel who have received and reviewed all of the information contained in the present document.

Maintain an updated logbook of the frequency of use of this product.

At the end of each season, remove snow/ice from nets and support poles, align net to be re-wound in a straight line, rotate the first support pole along the net to create a bundle and place the nets in the appropriate transport/storage cradles.

Nets should be stored clean, dry and out of direct sunlight, and away from extreme heat and in a well-ventilated warehouse. Nets should be kept off the floor and stored upright, on racks, to provide ventilation underneath. It is better to store the nets to allow drainage and prevent contact of the fiber with the ground. Never store directly on a concrete, metal or dirt floor, and under no circumstances should nets and/or acid and/or alkalis by kept in the same building. Product life will be shortened by chemical and corrosive products or excessive temperatures.